



# MICRO-SPRINKLERS

NaanDanJain's wide selection of micro-sprinklers enables our teams to **tailor highly customized solutions** for every application. Offering a high level of accuracy, uniformity and reliability, the micro-sprinkler range **includes sprayers, rotors, misters and foggers.**

**NAANDANJAIN**

A **JAIN IRRIGATION** COMPANY

# CONTENTS

Introduction.....	3
Modular Group.....	4-5
Hadar 7110.....	6-7
AquaMaster 2005.....	8-9
AquaSmart 2002.....	10-11
Eliminator.....	12-13
Smart-Spin.....	14-15
Smart-Jet.....	16-17
Dan-Jet PC.....	18
Turbo-Jet.....	19
Flipper.....	20-21
Green Spin.....	22-23
Green Mist.....	24-25
Fogger.....	26-27
Super Fogger.....	28-29
Super LPD (Leakage Prevention Device).....	30-31
Spark.....	32-33
Accessories.....	34-37
Maintenance for Micro-sprinklers & Foggers.....	38-39

# INTRODUCTION

Micro-sprinkler irrigation is a major pressurized micro-irrigation method.

The advanced plastic molding technology allows for the development and manufacture of water emitters with extreme diversity of flow rates, distribution patterns and droplet sizes.

Micro-sprinkler irrigation has numerous applications, including:

- Undertree irrigation of fruit trees
- Irrigation in greenhouses and nurseries
- Irrigation of landscapes and residential gardens
- Frost protection in orchards and vineyards
- Climate control (cooling and humidification) in greenhouses, poultry houses and livestock areas
- Pesticide spraying in greenhouses and orchards
- Special industrial applications

NaanDanJain is a world leader in the development and marketing of the most advanced micro-sprinkler irrigation technologies. The company offers the widest selection of micro-sprinklers, providing tailor-made solutions for all applications, with a high level of accuracy, uniformity and reliability.

# MODULAR GROUP



Complete range of micro-sprinklers and micro-jets

## APPLICATIONS

- Irrigation in orchards, vegetables and gardens
- Irrigation in greenhouses and shade houses
- Cooling of poultry and livestock

## STRUCTURE AND FEATURES

Broad range of wetted diameters and flow rates

- Full- and part-circle patterns
- Small, medium or large droplets produced by different sprayers, swivels or anti-mist devices



## TECHNICAL DATA

- Recommended working pressure: 1.5-3.0 bar
- Flow rate: 25-400 l/h
- Wetted diameter: 1-10 m
- Filtration requirement: 130 micron for purple and brown nozzles  
200 micron for other nozzles



### MODULAR NOZZLE AND FLOW RATE VS. PRESSURE

Color	Flow rate (l/h)	Nozzle ID (mm)	Pressure (bar)					
			1.0	1.5	2.0	2.5	3.0	3.5
Violet	35	0.82	25	30	35	39	43	46
Brown	43	0.94	32	37	43	50	55	60
Grey	70	1.16	49	60	70	78	86	93
Green	105	1.41	74	90	105	117	129	139
Orange	120	1.50	85	105	120	134	147	159
Yellow	160	1.73	113	140	160	179	196	212
Blue	200	1.92	141	170	200	224	245	265
Ivory	235	2.07	166	204	235	263	288	311
Red	260	2.18	184	225	260	291	318	344
Black	300	2.34	212	260	300	335	367	397

### WETTED DIAMETER (m) AT 2.0 BAR AND 0.25 m ABOVE GROUND LEVEL

Anti-mist color (Ø)	Nozzle color	Flow rate (l/h)	Nozzle ID (mm)	Static Spreaders							Swivels						
				90°	180°	Mist sprayer	Strip	Close-range spreader	Flat	12 Jet	Small black	Anti-ant	One sided black	One sided blue	Big orange	Inverted	
	Violet	35	0.82	1.7	2.2	1.5	3.2	0.9	2.8	3.4	5.5	6.0	6.5			0.60	1.80
	Brown	43	0.94	1.7	2.5	1.8	4.2	0.9	3.4	4.5	5.5	6.0	6.5			5.0	6.0
	Grey	70	1.16	2.5	2.7		8.5	0.9	3.4	5.5	6.0	6.5	7.5			6.5	7.5
	Green	105	1.41	3.5	2.7		9.0	0.9	3.4	6.0	6.0	7.0	7.5		9.0	8.0	8.5
	Orange	120	1.50	4.5	2.7		9.0	0.9	4.0	6.0	6.0	7.0	8.0		9.0	8.0	9.0
	Yellow	160	1.73								6.5	8.0	8.0	8.0	9.0	9.0	9.5
	Blue	200	1.92									8.0	8.5	8.5	9.0	9.0	10.0
	Ivory	235	2.07										8.5	9.0	10.0	9.0	10.5
	Red	260	2.18										8.5	10.0	10.0	9.0	11.0
	Black	300	2.34										9.0	10.5	10.0	9.5	11.0
Green /0.94	Green	40	1.41	2.0	1.2		2.8	0.8	3.5	2.5	4.0					4.5	6.0
Orange /1.16	Orange	70	1.50	2.2	2.2		5.0	0.8	3.5	4.5	5.0					6.0	7.5
Yellow /1.40	Yellow	90	1.73	2.5	2.5		5.5	0.9	4.0	5.0	5.5					6.0	8.0
Blue /1.50	Blue	120	1.92	2.5	2.7		7.0	1.0	4.0	6.0	6.0					6.5	8.0

Tested under laboratory conditions  
\* Inverted swivel tested at 0.6m and 1.8 m  
\*\* Only for upright uses

# HADAR 7110



For irrigation, propagation and micro-climate

## APPLICATIONS

- Horticulture and viticulture
- Orchards
- Greenhouses and nurseries
- Landscapes

## STRUCTURE AND FEATURES








- Bayonet coupling
- Modular construction for simple use and modification
- Wide range of wetted patterns with 9 different inserts
- 11 color-coded nozzles with flow rates from 23-333 l/h
- Excellent water distribution
- Leakage Prevention Device (LPD)



## TECHNICAL DATA

- Recommended working pressure: 1.5-3.0 bar
- Wetted diameter: 1.7-11.0 m
- Filtration requirements:
  - 130 micron (120 mesh) for nozzles 0.8-1.2 mm
  - 200 micron (80 mesh) for nozzle 1.3 mm and more

**WETTED DIAMETER (m) AT 2.0 BAR**

Nozzle size (mm)	Nozzle color	Flow rate (l/h)								
			Mist sprayer	Small sprayer	Extra-range and insect-resistant sprayer	Half-circle (180°) sprayer	Mini-range rotor 40L	Medium-range rotor	Extra-range rotor	Inverted rotor*
0.8	Black	33	2.0	2.2						
0.9	Grey	41	2.1	2.3	2.4		6.0			
1.0	Purple	50	2.3	2.4	3.0			6.6		8.4
1.1	Red	61	2.4	2.6	3.2			7.0		8.5
1.2	Orange	75	2.6	2.8	3.6			7.5		9.0
1.3	Green	87	3.0	2.9	3.6	3.0		8.5		9.5
1.4	Blue	103	3.3	3.1	3.6	3.1			9.4	10.0
1.6	Yellow	128	3.6	3.0	3.7	3.3			9.6	10.2
1.8	Bright Green	166	4.1	3.0	3.8	3.4			10.2	10.6
2.0	White	199	4.4	3.2	3.9	3.5			10.4	11.0
2.3	Brown	265	5.4		4.2	3.7			10.6	

\*Tested under laboratory conditions at 2.0 above ground

**PERFORMANCE TABLE 7110 INVERTED ROTOR AT 2 BAR PRESSURE**

Nozzle (mm)	Nozzle color	Flow rate (l/h)	Diameter (m)	Precipitation (mm/h) Spacing (m)												
				3x3	3x4	3x5	4x4	4x5	4x6	5x5	5x6	6x6				
1.3	Green	87	9.5	9.7	7.3	5.8	5.4	4.4			3.5					
1.4	Blue	103	10.0	11.4	8.6	6.9	6.4	5.2								
1.6	Yellow	128	10.2	14.2	10.7	8.5	8.0	6.4	5.3	5.1	4.3	3.6				
1.8	Bright Green	166	10.6	18.7	14.0	11.2	10.5	8.4	7.0	6.7	5.6	4.7				
2.0	White	199	11.0	22.1	16.6	13.3	12.4	10.0	8.3	8.0	6.6	5.5				

\*Tested under laboratory conditions at 2.0 above ground

Color code distribution uniformity	CU>92%	CU=89-92%	CU=85-88%	CU<85%

**7110**  
Inverted rotor with LPD



**7110 mist sprayer**  
4.0 mm inserted base



Leakage Prevention Device (Super LPD)

**MIST SPRAYER FOR PROPAGATION**

- Spacing on line: 1.0 m
- Spacing between laterals: two laterals for 1.4-1.6 m table width  
single lateral for 1.2 m table width
- Recommended working pressure: 2.5-4.0 bar



# AQUAMASTER 2005

Economical solution for undertree and greenhouse and overhead irrigation



## APPLICATIONS

- For widely-spaced plantations such as walnut, almond, avocado and mango
- For overhead irrigation of vegetables and nurseries
- IrriStand systems (up to 6 x 6 m spacing )

## STRUCTURE AND FEATURES


- Extra-long range
- Simple, user-friendly structure
- Uniform coverage over a wide range of spacings, flow rates and pressures
- Insect-resistant nozzle
- Large droplets
- Innovative spike
- Inverted version available for tunnels and greenhouses



**TECHNICAL DATA**

- Recommended working pressure: 1.5-3.0 bar
- Recommended working pressure (inverted version): 2.0-3.0 bar
- Flow rate: 30-365 l/h
- Wetted diameter: 5.5-12.5
- Filtration requirements: purple and brown nozzles -130 microns  
other nozzles -200 microns

**COMPONENTS**

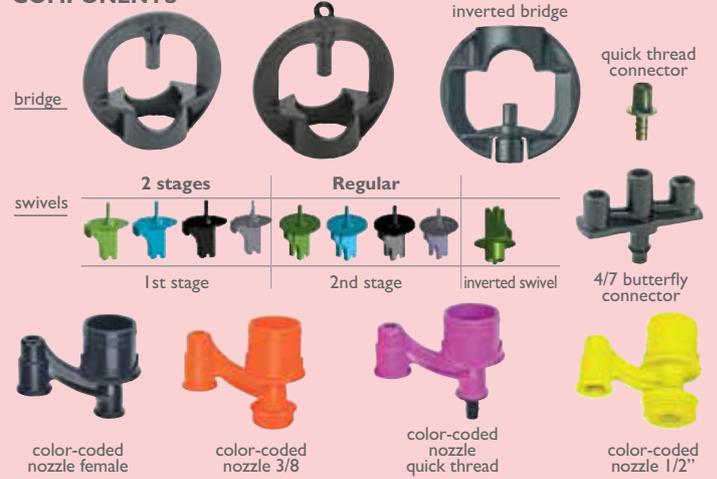

**FLOW RATE (l/h) VS. PRESSURE (bar)**

Nozzle Color	Nozzle Ø mm	Pressure (bar)		
		1.5	2.0	2.5
Violet	0.80	30	35	39
Brown	0.94	43	50	56
Grey	1.14	61	70	78
Turquoise	1.34	78	90	101
Green	1.40	91	105	117
Orange	1.50	104	120	134
Black	1.74	139	160	179
Blue	1.94	173	200	224
Yellow	2.16	215	250	305
Red	2.36	260	300	335

**INVERTED MODEL - FLOW RATES AND WETTED DIAMETERS AT PRESSURE 2.0 BAR**

Swivel color	Nozzle color	Flow rate (l/h)	D (m)
Green inverted	Violet	35	6.5
	Brown	50	7.5
	Grey	70	9.0
	Turquoise	90	10.0
	Green	105	10.0
	Orange	120	10.5
	Black	160	11.0
	Blue	200	11.5

\*Tested under laboratory conditions at 1.8 m height

**FLOW RATES AND WETTED DIAMETER (m) AT 2.0 BAR**

Swivels - Wetted diameter (m)									
Nozzle color	Flow rate (l/h)	Black		Blue		Grey		Green	
		1st stage	Regular (2nd stage)						
Violet	35	2.0	5.5						
Brown	50	2.0	6.5						
Grey	70			2.5	7.0				
Turquoise	90			2.5	9.0				
Green	105			3.0	9.0				
Orange	120					2.0	5.5		9.5
Black	160					2.5	6.0	2.5-3.5	10.0
Blue	200					2.5	6.0		10.5
Yellow	250					3.0	6.0		11.5
Red	300					3.0	7.0		12.5

\* Tested under laboratory conditions at 0.25m height.

\* 2 stages Green swivel only for 120-200 lph.

**PERFORMANCE TABLE FOR INVERTED APPLICATION**

Precipitation rate (mm/h) Spacing (m)					
Nozzle color	Flow rate (l/h)	3x3	4x4	4x6	5x5
Grey	70	7.7	4.4	2.9	2.8
Turquoise	90	10	5.6	3.8	3.6
Green	105	11.7	6.6	4.4	4.2
Orange	120	14.0	7.9	5.3	5.1
Black	160	17.5	9.9	6.6	6.3

\*Tested under laboratory conditions at 1.8 m height and 2.0 bar

Color code distribution uniformity	CU>92%	CU=89-92%	CU=85-88%	CU<85%
------------------------------------	--------	-----------	-----------	--------

**HEAD LOSS (m) 1.0m Tube Length**

Nozzle color	Flow rate (l/h)	3/8" thread, 1/2" thread & female connections			Quick thread connection
		4/7 PVC tube	5/8 PE tube	7/10 PVC tube	4/7 PES tube
Violet	35	0.8	0		0.9
Brown	50	1.2	0.1		1.1
Grey	70	1.3	0.5		1.7
Turquoise	90	1.5	0.7		2.6
Green	105	1.7	0.9		3.7
Orange	120	2.6	1.4		4.5
Black	160	4.6	2.4		
Blue	200			1.2	
Yellow	250			1.3	
Red	300			1.6	

**PERFORMANCE TABLE FOR IRRISTAND APPLICATION**

Precipitation rate (mm/h) Spacing (m)							
Swivel Color	Nozzle Color	Flow Rate (l/h)	D (m)	3x3	4x4	5x5	6x6
Blue	Grey	70	7.0	7.8	4.4		
	Turquoise	90	9.0	10	5.6		
	Green	105	9.0	11.6	6.5		
Green	Orange	120	9.5	13.3	7.5	4.8	3.3
	Black	160	10.0	17.8	10	6.4	4.5
	Blue	200	10.5	22.3	12.6	8	5.6
	Yellow	250	11.5	27.8	15.7	10	7
	Red	300	12.5	32.9	18.5	11.8	8.2

\*Tested under laboratory conditions at 0.6 m height and 2.0 bar

# AQUASMART 2002



## Flow-regulating micro-sprinkler

### APPLICATIONS

- For optimal undertree irrigation

### STRUCTURE AND FEATURES

- Constant flow between 1.5-4.0 bar pressure
- Uniform irrigation and fertigation in all topographical conditions
- Wide range of flow rates and distribution patterns
- Insect-proof nozzle
- Sturdy and solid structure
- Easy to dismantle and assemble
- Innovative spike with locking clip and water-stop aid
- Deflector helps prevent wetting of tree trunks
- Special swivel (green) for inverted operation
- Two-stage wetted diameter control
- Clog resistant even at lowest flow rates



**TECHNICAL DATA**

- Recommended working pressure: 1.5-4.0 bar
- Flow rate: 20-95 l/h
- Wetted diameter: 3.0-7.5 m

**COMPONENTS**



\* 1st stage: with diameter limiter, for young trees  
 \*\* Regular (2nd stage): break off the diameter limiter, for mature trees


**SWIVELS - WETTED DIAMETER (m)**

Nozzle color	Flow rate (l/h)	Nozzle (mm)	Orange* (close range)	Black Swivel (medium range)		Blue Swivel (large range)		Green (inverted)**
				1st stage	Regular (2nd stage)	1st stage	Regular (2nd stage)	
Violet	20	0.84	3.0	1.5	3.5			
Grey	28	1.00	3.0	2.0	4.0	1.5	4.5	5.0
Brown	35	1.10	3.5	2.5	4.0	2.0	5.0	5.0
Blue	47	1.25	3.5	2.5	4.5	2.0	5.5	5.0
Green	55	1.33	3.5	2.5	4.5	2.0	6.0	5.0
Orange	70	1.48		2.5	5.0	2.5	7.0	5.0
Yellow	95	1.75		3.0	5.5	3.0	7.5	5.0

All swivels tested under laboratory conditions at 0.25 m above ground

\* One stage only (no diameter limiter)

\*\* Green swivel tested at 0.6 m above ground

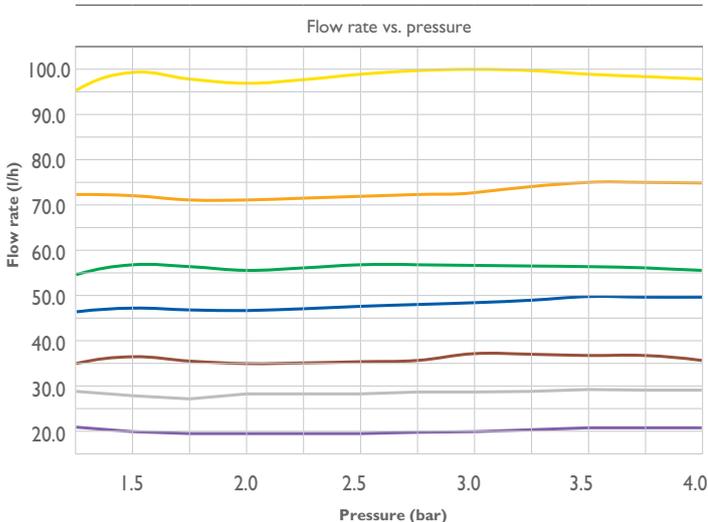

**STANDARD ASSEMBLIES**




# ELIMINATOR



**Insect-proof flow regulating  
micro-sprinkler for undertree irrigation**

## STRUCTURE AND FEATURES

- Prevents intrusion of all insects, including ants, snails, earwigs, spiders and Fuller's rose weevil
- Resistant to dust, sand, weeds and other external elements
- Flow-regulating for water saving and optimal efficiency
- Reliable, maintenance-free performance
- Wide range of flow rates and distribution patterns

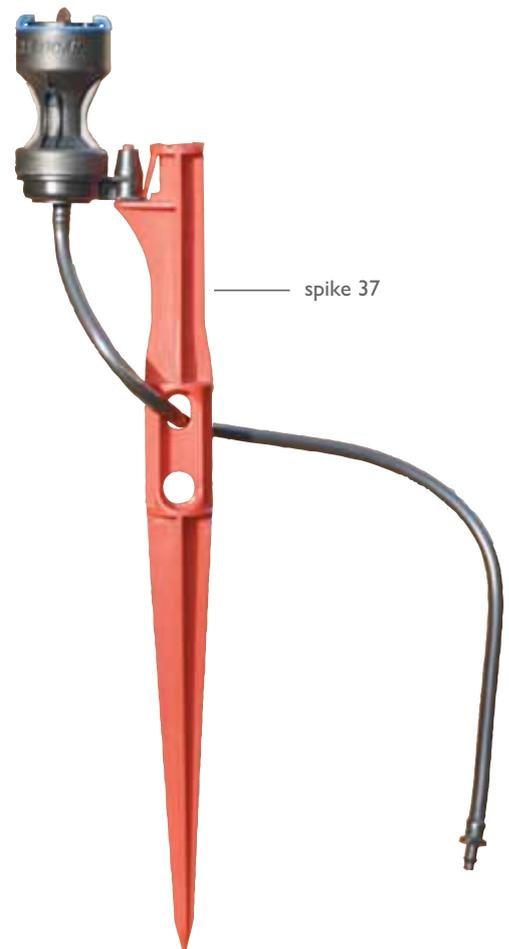

## TECHNICAL DATA

- Recommended working pressure: 1.5-4.0 bar
- Flow rate: 20-95 l/h
- Diameter coverage: 4.0-7.0 m
- Two-stage wetted diameter control



## PERFORMANCE TABLE

Regulator & nozzle bridge color	Flow rate (l/h)	Swivel color	Wetted diameter (m)
Purple	20	Black	4.0
Grey	28	Black	5.0
Brown	35	Black	5.5
Black	40	Black	5.5
Blue	47	Black	6.0
Green	55	Black	6.0
Orange	70	Black	7.0
Yellow	95	Black	7.0

Tested under laboratory conditions.

For 2 stages Eliminator:

- 1<sup>st</sup> stage: wetted diameter is: 3-4m.
- 2<sup>nd</sup> stage: wetted diameter is according to the table.

## HOUSINGS



**NEW**

# SMART SPIN FAMILY



Optimal solution for under tree applications (irrigation & fertigation)

Smart Spin  
Medium range

Smart Spin  
Extra range

Smart Spin PC  
Medium range

Smart Spin PC  
Extra range

## APPLICATIONS

For under tree applications like in: orchards, vineyards, citrus and landscape

## STRUCTURE AND FEATURES

Both models: Smart Spin (Non-regulated) & Smart Spin PC (regulated)

- Simple and user-friendly structure
- Working on low pressure from 0.7 bar
- Various swivels: Mini, Medium and Extra range swivels for wide range of wetted diameters
- Inverted swivel for orchards, nurseries and greenhouses
- Uniform coverage over a wide range of spacing
- Sturdy and solid structure
- Quick thread connection adapted directly to SPE micro tube for economic complete solution
- Parallel connection is available for installing on butterfly stands
- Spike 34 ensures stability, rigidity and friendly installation

## TECHNICAL DATA


- Recommended working pressure:
  - Smart Spin: 0.7 – 3.0 bar
  - Smart Spin PC: 1.0 - 3.0 bar
- Filtration requirements: 130 microns (120 mesh)






Smart Spin Performance Table: Flow rate (l/h) & Wetted Diameter (m) at various pressures (bar)								
Nozzle color	Nozzle Diameter (mm)	Pressure (bar)	Flow rate (l/h)	Mini Range Swivel	Medium Range Swivel	Extra Range Swivel	Inverted swivel	
							tested at 0.60m height	tested at 1.80m height
Black	0.64	0.7	15	3.0	4.5		4.0	6.0
		1.0	19	4.0	5.0		5.0	6.5
		1.5	23	4.0	5.5		5.0	6.5
		2.0	27	4.0	5.5		5.5	6.5
		2.5	30	4.0	5.5		5.5	6.5
		3.0	33	4.0	5.5		5.5	6.5
Orange	0.86	0.7	23	3.5	5.0		5.0	6.0
		1.0	28	4.0	5.5		5.0	6.5
		1.5	34	4.5	6.0		6.0	7.0
		2.0	40	5.0	6.0		6.0	7.0
		2.5	45	5.0	6.5		6.0	7.0
		3.0	49	5.0	6.5		6.5	7.5
Blue	0.94	0.7	28	4.0	5.5		5.0	7.0
		1.0	35	4.5	6.0		6.0	7.5
		1.5	42	4.5	6.5		6.0	7.5
		2.0	49	5.0	6.5		6.5	7.5
		2.5	54	5.0	6.5		6.5	7.5
		3.0	60	5.0	7.0		6.5	7.5
Violet	1.10	0.7	39	4.5	6.0		5.5	7.0
		1.0	46	5.0	6.5		6.0	7.5
		1.5	57	5.5	7.0		6.5	8.0
		2.0	66	5.5	7.5		6.5	8.0
		2.5	74	5.5	8.0		7.0	8.0
		3.0	81	5.5	8.0		7.0	8.0
Green	1.20	0.7	45	5.0	6.0	6.5	6.0	7.5
		1.0	55	5.5	6.5	7.5	6.5	8.0
		1.5	67	6.0	7.5	8.0	7.0	8.5
		2.0	78	6.0	7.5	8.0	7.0	8.5
		2.5	86	6.5	8.0	8.5	7.0	8.5
		3.0	95	6.5	8.0	8.5	7.0	8.5
Yellow	1.34	0.7	57	5.0	6.5	7.0	6.0	7.5
		1.0	67	5.0	7.0	7.5	6.5	8.0
		1.5	84	5.5	7.5	8.0	7.0	8.5
		2.0	96	6.0	8.0	8.0	7.0	8.5
		2.5	108	6.5	8.0	8.5	7.5	8.5
		3.0	119	6.5	8.5	8.5	7.5	8.5
Red	1.44	0.7	65	5.5	6.0	7.0	6.0	8.0
		1.0	79	5.0	7.0	8.0	6.5	8.5
		1.5	96	6.0	7.5	8.5	7.0	8.5
		2.0	110	6.0	8.0	9.0	7.5	8.5
		2.5	124	6.5	8.0	9.0	7.5	9.0
		3.0	136	6.5	8.5	9.0	7.5	9.0
<b>Smart Spin PC</b>								
Black	0.85	1.0 - 3.0	19	3.5	4.5		4.0	6.0
Orange	1.05		28	3.5	5.0		4.5	6.5
Blue	1.15		35	3.5	5.0		4.5	6.5
Violet	1.25		46	4.5	6.0		5.5	7.5
Green	1.35		55	4.5	6.0	7.0	5.5	7.5
Yellow	1.55		67	4.5	6.0	6.5	5.5	7.5
Red	1.65		79	5.0	6.0	7.0	6.0	8.0

All upright swivels tested under laboratory conditions at 0.25 m above ground

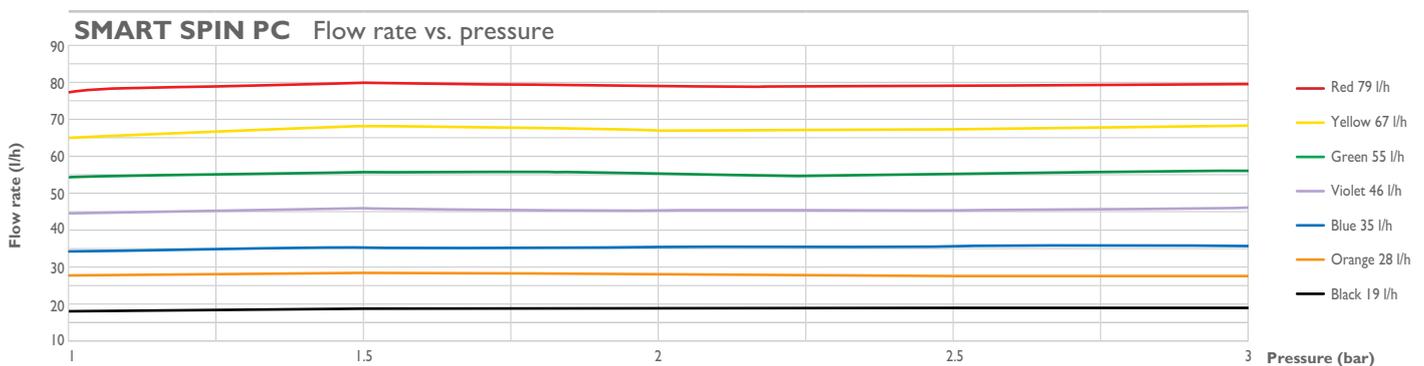

# SMART JET FAMILY <sup>PAT. PENDING</sup>

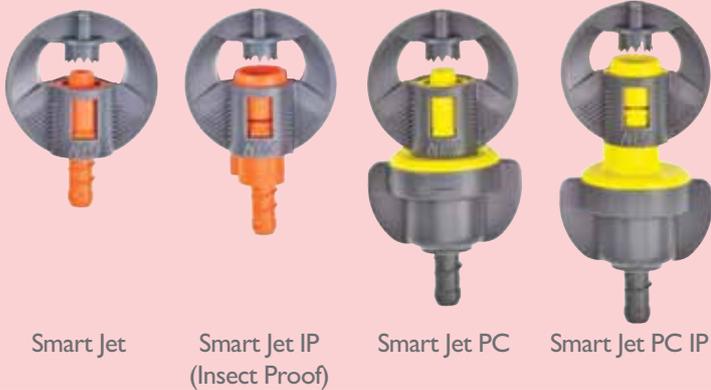

## APPLICATIONS

For orchards, vineyards, citrus and landscape

## STRUCTURE AND FEATURES

- All models use the same frame for each unique jet pattern.
- Exclusive approach of insect Proof based on extended nozzles.
- Insect Proof model reduces plugging and amount of labor needed to check plugging.
- PC model maintains flow and enables using longer laterals.
- No wear & tear.
- Large variety of nozzles & jet patterns.
- With different jet patterns, Smart Jet family can match any tree spacing.
- Adaptors are available for matching Smart Jet to NDJ spikes (31, 36 & 37) and 5.8mm rod.
- For young trees Smart Cap to limit wetted area. To be removed for larger wetted area (mature trees).



- The only static jet in the market that has all options of pressure compensation and insect proof with a variety of patterns: Smart Jet, Smart Jet IP (Insect Proof), Smart Jet PC and Smart Jet PC IP.
- Full and wide range of options makes it easy and economical to match any application.
- Smart Cap to limit wetted area for irrigating young trees.



## TECHNICAL DATA

### Smart Jet & Smart Jet IP:

- Recommended working pressure: 0.7 - 3.0 bar
- Flow rates: 15 - 136 l/h
- Filtration requirements: 130microns (120 mesh)

### Smart Jet PC & Smart Jet PC IP:

- Recommended working pressure: 1.0 - 3.0 bar
- Flow rates: 17 - 85 l/h
- Filtration requirements: 130microns (120 mesh)

**SMART JET & SMART JET IP- DISTRIBUTION PATTERNS AND WETTED DIAMETERS (m)**

Tested at 0.25m height


Nozzle color	Nozzle Diameter (mm)	Pressure (bar)	Flow rate (l/h)									
				J (16 jets)	U (270°)	C (210°)	A Low	A High	S (Strip)**	SF (Strip Flat)**	H (180°)	I (inverted)*
Black	0.64	0.7	15	3.3	3.8	4.7	3.2	3.7	3.2	1.9	3.7	3.2
		1.0	19	3.9	4.0	5.0	3.9	4.3	3.7	2.6	4.4	3.8
		1.5	23	4.2	4.6	5.6	4.3	4.6	4.2	3.4	5.2	4.2
		2.0	27	4.4	4.8	5.9	4.7	4.8	4.3	4.0	5.7	4.8
		2.5	30	4.7	5.3	6.5	4.8	5.4	4.5	3.8	6.2	5.1
		3.0	33	4.8	5.6	6.7	5.2	5.6	4.7	3.8	6.4	5.3
Orange	0.86	0.7	23	3.8	4.4	5.4	3.7	4.3	3.9	3.2	4.1	3.8
		1.0	28	4.4	4.8	6.1	4.3	4.8	4.4	4.0	5.0	4.4
		1.5	34	5.0	5.6	7.1	5.2	5.8	4.8	4.5	5.6	5.3
		2.0	40	5.4	6.2	7.6	5.5	6.2	4.9	4.6	6.5	5.9
		2.5	45	5.6	6.7	8.6	5.8	6.5	5.3	4.6	7.0	6.7
		3.0	49	6.0	7.2	9.1	6.1	7.0	5.5	4.6	7.4	7.4
Blue	0.94	0.7	28	4.1	4.5	6.0	4.5	4.8	4.3		4.3	4.4
		1.0	35	4.8	5.2	6.9	5.1	5.7	4.7		5.1	4.9
		1.5	42	5.7	6.0	7.9	5.7	6.2	5.1		6.1	5.9
		2.0	49	6.2	6.5	8.9	6.3	7.0	5.5		6.9	6.7
		2.5	54	6.6	6.9	9.5	6.7	7.3	5.9		8.0	7.0
		3.0	60	7.1	7.1	10.2	7.1	7.8	6.4		8.6	7.5
Violet	1.10	0.7	39	5.0	5.4	6.7	4.8	5.6	4.8		5.1	4.8
		1.0	46	6.1	6.1	7.8	5.7	6.2	5.3		5.9	5.5
		1.5	57	6.6	7.3	8.7	6.2	7.2	6.1		6.7	6.4
		2.0	66	7.3	7.9	9.9	7.1	7.8	6.7		8.2	7.4
		2.5	74	7.8	8.6	10.8	7.6	8.7	7.1		9.2	8.2
		3.0	81	8.4	9.1	11.7	7.8	9.1	7.6		10.1	8.6
Green	1.20	0.7	45	4.9	6.0	6.9	5.1	5.8	5.1		5.5	5.0
		1.0	55	5.9	6.7	8.1	6.1	6.9	5.8		6.7	6.0
		1.5	67	6.9	7.6	9.2	6.9	7.8	6.3		7.7	7.1
		2.0	78	7.7	8.6	10.6	7.3	8.4	6.9		8.7	8.2
		2.5	86	8.6	9.3	11.4	8.0	8.7	7.4		10.1	8.9
		3.0	95	9.5	10.0	12.5	8.4	9.3	8.3		10.8	9.5
Yellow	1.34	0.7	57	5.7	6.3	7.3	6.0	6.5	5.6		5.9	5.7
		1.0	67	6.7	7.3	8.5	6.9	7.4	6.5		7.0	7.1
		1.5	84	7.7	8.7	9.9	8.0	8.6	7.3		8.7	8.6
		2.0	96	8.5	9.7	11.5	8.7	9.4	8.0		9.9	9.6
		2.5	108	9.6	10.8	12.6	9.3	9.9	8.8		11.0	10.8
		3.0	119	10.6	11.3	13.4	9.7	10.2	9.5		12.1	11.4
Red	1.44	0.7	65	6.0	7.0	7.8	6.3	7.1	5.9		6.3	6.0
		1.0	79	7.0	8.1	9.4	7.4	8.2	6.7		7.2	7.3
		1.5	96	8.3	9.7	11.0	8.6	9.7	7.6		9.3	8.9
		2.0	110	9.2	10.8	12.5	9.7	10.4	8.6		10.3	9.9
		2.5	124	10.1	11.7	13.4	10.8	11.2	9.4		11.7	11.0
		3.0	136	10.9	12.2	14.3	11.2	11.5	10.1		12.0	11.9

**SMART JET PC & SMART JET PC IP- DISTRIBUTION PATTERNS AND WETTED DIAMETERS (m)**

Black	0.85	1.0-3.0 bar	19	3.2	3.7	4.5	3.9	4.3	3.3	2.9	3.8	3.5
Orange	1.05		28	3.7	4.4	4.7	4.0	4.5	3.8	3.2	4.2	4.1
Blue	1.15		35	4.1	5.0	5.4	4.3	4.9	4.1	3.6	4.9	4.7
Violet	1.25		46	4.6	5.7	5.9	4.9	5.5	4.6	3.8	5.7	5.1
Green	1.35		55	5.3	6.6	6.5	5.5	6.1	5.3	4.7	6.4	5.9
Yellow	1.55		67	5.7	7.1	7.4	6.0	6.5	5.7	5.1	6.7	6.3
Red	1.65		79	6.3	8.0	8.5	6.8	7.6	6.3	6.1	7.1	7.0

\* Tested at 0.6m height

\*\* Pattern width: 0.8 - 1.2 m

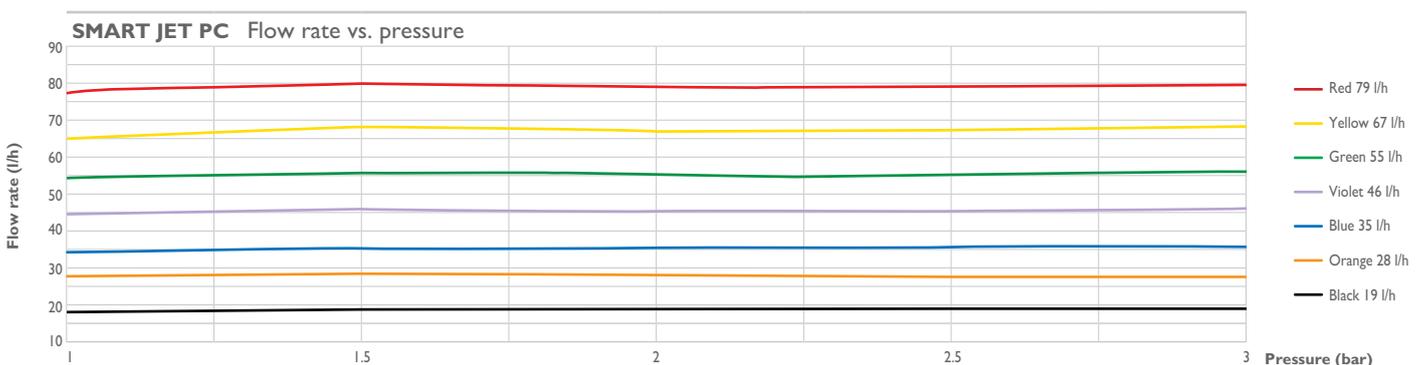

# DAN-JET PC


## CONNECTORS



4/7 barb

parallel

quick thread

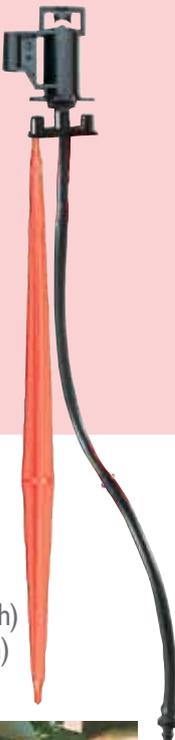

## Flow-regulating micro-jet

### APPLICATIONS

- For undertree, vineyard and landscape irrigation

### STRUCTURE AND FEATURES

- Low maintenance static ray-jet
- Pressure compensating-constant flow rate over wide pressure range
- Diverse distribution patterns and wetted diameters
- High resistance to clogging
- Floating regulation membrane allows spacious water pathways
- Large number of spreader and nozzle combinations


## TECHNICAL DATA

- Recommended working pressure: 1.0-3.0 bar
- Flow rate: 19-76 l/h
- Filtration requirements:  
black, orange and blue nozzles -130 microns (120 mesh)  
violet, green and red nozzles -200 microns (80 mesh)



## PERFORMANCE TABLE

Nozzle color	Flow rate (l/h)	Nozzle diameter (mm)
Black	19	0.89
Orange	28	1.17
Blue	38	1.30
Violet	47	1.55
Green	57	1.65
Red	76	1.93

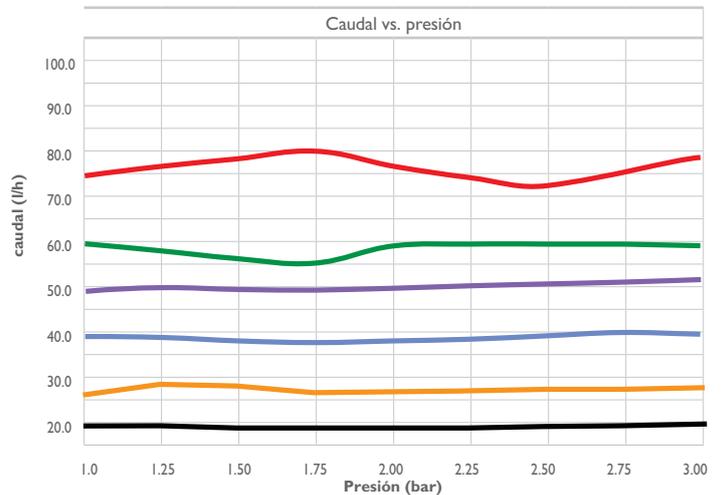

## DISTRIBUTION PATTERNS AND DIAMETERS (m)

TESTED AT 2.0 bar, 0.25 m HEIGHT

Nozzle color	Static Spreaders								
	Strip	300°	12 jets	16 jets	20 jets	180° (radius)	Inverted*	Flat (no jets)	Strip flat (no jets)
Black	2.4	3.0	3.2	3.0	2.4	1.5	2.5	2.4	2.0
Orange	2.6	3.2	3.6	3.2	2.8	1.7	3.3	2.6	2.2
Blue	3.2	4.0	4.4	4.6	3.6	2.2	3.8	3.0	
Violet	3.8	4.4	4.8	4.8	4.0	2.4	4.0	3.1	
Green	4.8	4.8	5.0	5.0	4.6	2.7	4.3	3.4	
Red	5.0	5.6	5.4	5.4	5.2	2.8	4.8	3.6	

Tested under laboratory conditions

\* tested at 0.6m above ground

# TURBO-JET

## CONNECTORS



4/7 barb



parallel



quick thread

## Low-maintenance micro-jet

### APPLICATIONS

- For orchard, vineyard and landscape irrigation



## STRUCTURE AND FEATURES

- Low maintenance emitter
- High resistance to clogging
- Diverse distribution patterns and wetted diameters
- Easy to open and clean
- Unique nozzle structure creates turbulent flow and wide water pathways
- Large number of nozzle and spreader combinations

## TECHNICAL DATA

- Recommended working pressure: 1.0-3.5 bar
- Flow rate: 16-110 l/h
- Filtration requirements:  
black, orange and blue nozzles -130 microns (120 mesh)  
violet, green and red nozzles -200 microns (80 mesh)

Wrench for Turbo-Jet  
Item # 820015



### FLOW RATES BY NOZZLE (l/h)

Pressure (bar)	Nozzle color/diameter (mm)					
	Black 0.80	Orange 1.00	Blue 1.15	Violet 1.30	Green 1.40	Red 1.65
1.0	16	23	31	40	48	62
1.4	19	28	37	47	57	76
2.0	23	33	43	56	69	88
2.5	25	36	47	63	75	98
3.0	27	38	50	69	80	105
3.5	29	41	53	74	85	111

## DISTRIBUTION PATTERNS AND DIAMETERS (m) TESTED AT 1.4 & 2.0 bar, 0.25 m HEIGHT

Nozzle color	Static Spreaders																	
	Strip		300°		12 jets		16 jets		20 jets		180° (radius)		Inverted*		Flat (no jets)		Strip flat (no jets)	
	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar
Black	2.7	3.0	3.2	3.8	3.4	4.1	3.1	4.2	3.4	3.2	1.5	2.2	2.8	3.0	2.2	2.2	2.3	2.4
Orange	3.0	3.7	4.0	4.4	4.3	4.7	4.0	5.6	3.6	4.0	1.8	2.3	3.2	3.8	2.3	2.4	2.4	2.5
Blue	3.7	4.2	4.8	5.6	4.6	4.9	4.2	6.0	3.8	4.4	2.2	2.4	3.8	4.8	2.4	2.6		
Violet	4.2	5.4	5.0	5.8	4.8	5.2	4.3	6.0	4.0	5.0	2.2	2.5	4.6	5.2	2.6	3.0		
Green	4.2	5.4	5.4	6.0	5.2	5.9	4.5	6.2	4.2	5.4	2.3	2.7	4.9	5.4	2.8	3.2		
Red	4.8	6.1	6.6	7.6	5.6	6.6	5.4	7.2	5.0	6.2	2.4	2.8	5.2	5.8	3.0	3.4		

Tested under laboratory conditions  
\* tested at 0.6m above ground


# FLIPPER



The most economical frost protection for vineyards

## STRUCTURE AND FEATURES

- Spreads water in a very long and narrow strip, targeting the vine rows only
- Saves up to 70% of water compared to conventional overhead systems
- Large droplets minimize the cooling effect when starting the system
- Safe operation under frost conditions
- Optional flow regulator for hilly terrain or long rows
- Low installation and pumping costs
- Dry pathways reduce waterlogging and facilitate access for workers and equipment soon after operation

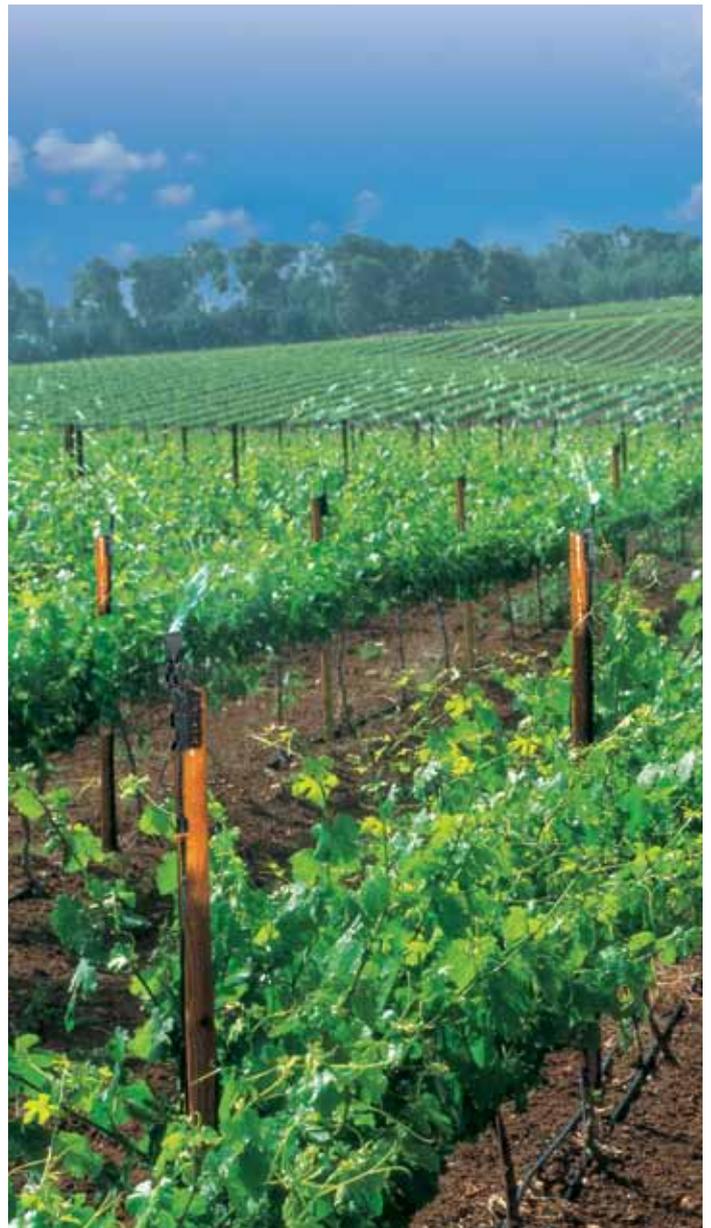

**COMPONENTS**



Flipper



Optional protecting box



Stabilizer

**Flow Regulators**



25 l/h



35 l/h



43 l/h

**TECHNICAL DATA**

- Recommended working pressure: 2.0-3.0 bar
- Flow rate: 25-45 l/h
- Filtration requirements: 130 microns (120 mesh)

**TIPS FOR INSTALATION & OPERATION**

- Ensure that the water stream is in line with the vine rows.
- Anchor the Flipper firmly to the post.
- Start the system before the critical damaging temperature is reached.
- To decide on a suitable start-up temperature, consider the dew points (see chart below).
- Stop the system only when the outside temperature is constant above 1°C.

**PERFORMANCE TABLE**

Nozzle color	Flipper color	Flow rate (l/h) (at 2 bar)	Maximal recommended spacing (m) between flippers**
Black	Black	25*	6.0
Violet	Black	35*	7.0
Brown	Brown	43*	9.0

\* For regulated unit: 2.5-4.0 bar

\*\* When Flippers mounted 1.0 m above the target

**AMOUNT OF WATER (m<sup>3</sup>/ha/hr) REQUIRED BY FLIPPER FROST PROTECTION SYSTEM\* AND WATER SAVING COMPARED TO CONVENTIONAL 40 m<sup>3</sup>/ha/hr SYSTEM**

Nozzle color	Vineyard with 3.0 m row spacing	% of water saving	Vineyard with 2.5 m row spacing	% of water saving
Black	14.0	65	16.0	58
Violet	16.6	58	20.0	50
Brown	16.0	60	19.0	52

\* When Flippers are at maximal spacing, at 2 bar pressure

**RECOMMENDED START-UP TEMPERATURES FOR FROST PROTECTION AT VARIOUS DEW POINTS**

Dew point temp. (°C)	-9.5	-9.0	-8.5	-8.0	-7.5	-6.5	-6.0	-5.5	-5.0	-4.5	-4.0	-3.5	-3.0	-2.0	-1.5
Start-up temp. (°C)	+4.0	+4.0	+3.5	+3.5	+3.0	+3.0	+3.0	+2.0	+2.0	+1.5	+1.5	+1.0	+1.0	+0.5	+0.5



# GREEN SPIN



**Non-drip inverted micro sprinkler**  
**Ideal for overhead irrigation in**  
**greenhouses**

## STRUCTURE AND FEATURES

- Bridgeless-no dripping during operation
- No deflection or “dead corners”
- Low trajectory
- Superior uniformity over a wide range of spacings
- Connections to PE or PVC pipes
- Optional Leakage Prevention Device (LPD) prevents drainage after shut-off
- Patent pending
- Tapered or bayonet connection





### TECHNICAL DATA

- Recommended working pressure: 2.0-3.0 bar
- Flow rate: 43-200 l/h
- Filtration requirements:  
brown and grey nozzles - 130 microns  
green, orange, black and blue nozzles - 200 microns

### COMPONENTS

color-coded nozzle



color-coded swivel




Swivel color	Nozzle color	Flow rate (l/h)	Wetted diameter (m)	Precipitation rate (mm/h) Spacing (m)												
				1.5x3	2x3	3x3	2x4	3x4	4x4	3x5	5x5	3x6				
Grey	Brown	43	8.0	9.4	7	4.7										
	Grey	70	9.0	15.5	11.6	7.7	8.7	5.8	4.4							
	Green	105	9.0	23.4	17.5	11.7	13.2	8.8	6.6	7						
	Orange	120	9.5	26.4	19.8	13.2	14.8	9.9	7.4	7.9	4.7					
Black	Black	160	9.0	35.4	26.5	17.7	19.9	13.3	9.9	10.6	6.4	8.8				
	Blue	200	9.5	44.3	33.3	22.2	24.9	16.6	12.5	13.3	8	11.1				

Tested at laboratory conditions at 2.0m above ground

Color code distribution uniformity	CU>92%	CU=89-92%	CU=85-88%	CU<85%
------------------------------------	--------	-----------	-----------	--------

# GREEN MIST

Double-purpose emitter for misting and irrigation over propagation benches

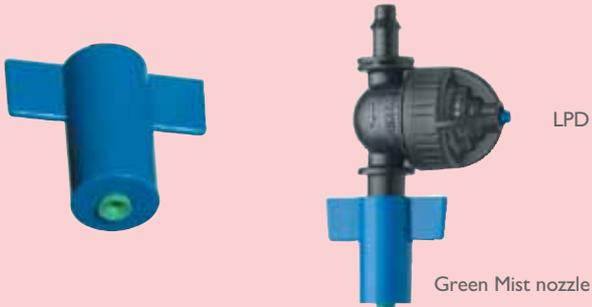

## STRUCTURE AND FEATURES

- Uniform coverage
- Ideal droplet size prevents drift of fine mist
- No dripping during operation
- Symmetrical water distribution with no deflection or “dead corners”
- Low pressure Leakage Prevention Device (LPD) for perfect pulsed operation
- Low cost





### TECHNICAL DATA

- Recommended working pressure: 2.0-3.5 bar
- Flow rate: 30-40 l/h
- Filtration requirements: 130 microns (120 mesh)
- Wetted diameter: 1.2 m


### INSTALLATION INSTRUCTIONS

- Height of units above bench: 1.0-1.2 m
- Max. spacing between units on lateral: 0.8 m
- Max. spacing between laterals: 0.8 m
- Max. distance of lateral from bench edge: 0.1 m

#### FLOW RATE VS. PRESSURE

Pressure (bar)	2.0	2.5	3.0	3.5
Flow (l/h)	30	34	37	40

### SCHEMATIC LAYOUT OF PVC INSTALLATION

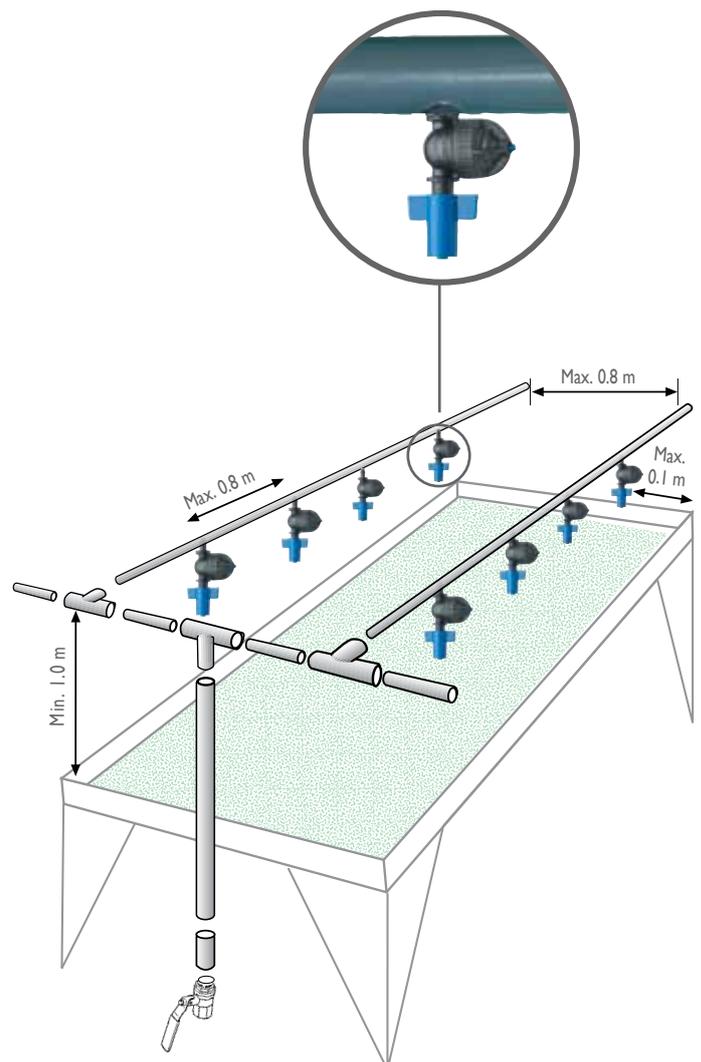

# FOGGER



Super LPD  
(high pressure)

For optimal cooling or humidifying of greenhouses



## FEATURES

- Extra fine droplet size (55 microns @ 4.0 bar)
- Range of flow rates for different precipitation rates
- High water distribution uniformity and coverage
- Chemical resistant raw materials
- PE and PVC connections
- Easy installation and service
- Filtration requirements: 130 microns (120 mesh)
- LPD (Leakage Prevention Device) for simultaneous startup and shut-down of the system
- High pressure LPD and Medium pressure LPD are available

## APPLICATIONS

- Reduces greenhouse temperature
- Increases greenhouse humidity
- Provides perfect conditions for plant propagation
- Fogger on T assembly used for pesticide application

### • For cooling and humidifying only:

- (4 foggers on cross or 2 foggers on T)
- 3.0-4.0 m between laterals
- 2.0-3.0 m between heads

### • For cooling, humidifying and spraying:

- (2 foggers on T only)
- 2.0-3.0 m between laterals
- 1.5 m between heads



Super LPD  
(medium pressure)

## OPTIONAL NOZZLES FLOW RATE (l/h)

Nozzle Color	Violet	Blue	Orange	Red	Black
3.0 bar	4.5	6.0	12.0	18.0	24.0
4.0 bar	5.3	7.0	14.0	21.0	28.0



# PROPAGATION SYSTEMS


## TECHNICAL DATA

### High pressure Super LPD

- Recommended working pressure: 4.0 bar
- Droplet size average - 55 micron (at 4.0 bar)
- Filtration requirements: 130 microns (120 mesh)
- Minimum height above crop: 1.0 m
- Max. spacing between units on laterals: 1.2 m
- Max. spacing between lateral: 1.2 m
- Max. distance of lateral from bench edge: 0.2 m


### Medium pressure Super LPD

- Opening pressure 3.0 bar
- Closing pressure - 1.5 bar
- Droplet size average - 69 micron at 3.0 bar

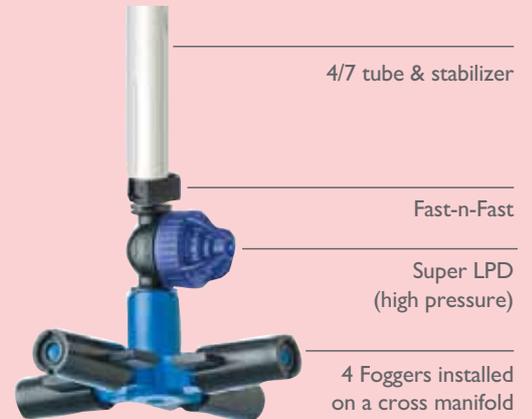

**FOGGER FLOW RATE ON CROSS (l/h)**

Nozzle Color	Violet	Blue	Orange	Red	Black
3.0 bar	18.0	24.0	48.0	72.0	96.0
4.0 bar	21.2	28.0	56.0	84.0	112.0

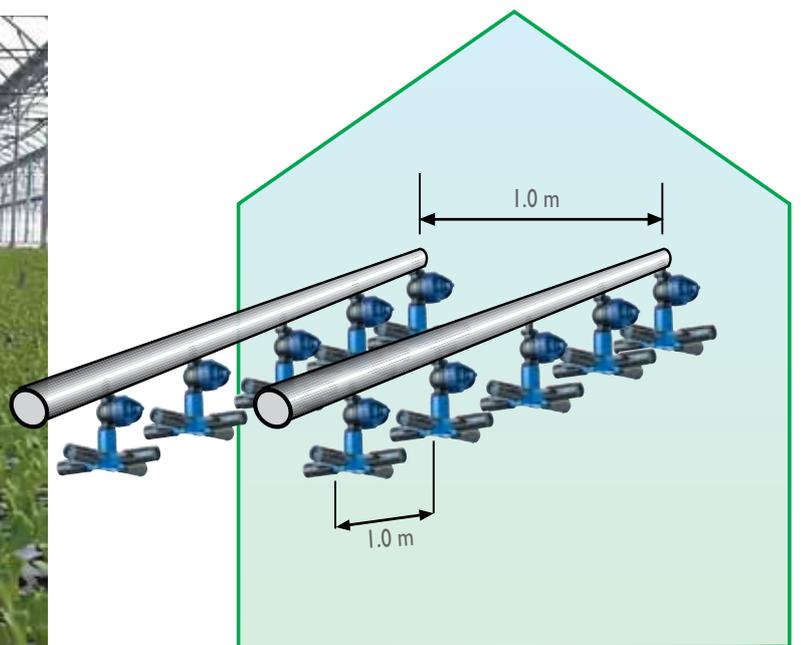

### Fogger Accessories



Please double check the final installation details with local NDJ representative.

# SUPER FOGGER

Super Fogger x 1



Super Fogger x 2



Super Fogger x 4



Green cover: Medium pressure  
Blue cover: High pressure

## Optimal and economical solution for cooling, humidifying, fungicide and pesticide spraying in greenhouses

- Various connections, outlets and pressures for multi greenhouse application.
- Economic - Built in Leakage Prevention Device, no need for additional LPD
- 3/8" thread connection with unique filter for extra protection.
- Low maintenance

### STRUCTURE AND FEATURES

- Single, two and four outlets are available
  - Super Fogger X1 (single outlet)
  - Super Fogger X2 (two outlets)
  - Super Fogger X4 (four outlets)
- Built-in LPD (Leakage Prevention Device)
  - High pressure (blue cover)
  - Medium pressure (green cover)
- Very small droplets for minimal foliage wetting during pulsed operation
- Excellent coverage when used for pesticide application
- Easy installation and service
- Chemical-resistant raw materials
- Connections for PE & PVC pipes
- Multi connections: female & 4/7 barb for PE pipes and 3/8" thread for PVC pipes.
- Recommended working pressure:
  - High pressure: 4.0 bar
  - Medium pressure: 3.0 bar
- Recommended filtration: 130 micron (120 mesh)





Super Fogger x 1



Super Fogger x 2



Super Fogger x 4

## TECHNICAL DATA

Model	Medium pressure* (green cover )				High pressure (blue cover )			
	FlowRate (l/h) at 3.0 bar	Opening Pressure (bar)*	Closing Pressure (bar)	Average Droplet Size (micron)	Flow Rate (l/h ) at 4.0 bar	Opening Pressure (bar)	Closing Pressure (bar)	Average Droplet Size (micron)
Super Fogger x1	5.6	3.0	1.5	69	6.5	4.0	2.4	55
Super Fogger x2	11.2	3.0	1.5		13	4.0	2.4	
Super Fogger x4	20.8	3.0	1.5		24	4.0	2.4	

\*Medium pressure model, maximal operation pressure 3.5 bar.

### Applications & recommended spacing\*:

Model	For climate control (cooling & humidifying)	For pesticide spraying	For propagation	For Poultry
Super Fogger X 1	n/a	n/a	n/a	1.5 X 3.0 m
Super Fogger X 2	1.5 X 3.0 m 2.0 X 4.0 m	1.5 X 3.0 m	n/a	3.0 X 3.0 m
Super Fogger X 4	3.0 X 3.0 m 2.0 X 4.0 m	n/a	1.0 x 1.0 m at 1.0 m height above table/plants	3.0 X 3.0 m

\* Spacing: Distance between heads X distance between laterals

\* Recommended spacing in the table are general.

\* Correct & required spacing according to the specific conditions (contact our experts).

### Models & connections:

Model	Connections	Item no.
Super Fogger X 1 - medium pressure	3/8" thread	197412
Super Fogger X 1 - high pressure	3/8" thread	197418
Super Fogger X 2 - medium pressure	Female	197802
	4/7 barb	197202
	3/8" thread	197402
Super Fogger X 2 - high pressure	Female	197808
	4/7 barb	197208
	3/8" thread	197408
Super Fogger X 4 - medium pressure	Female	197842
	4/7 barb	197242
Super Fogger X 4 - high pressure	Female	197848
	4/7 barb	197248

### General guidelines

- The system of climate control is common for vegetables, flowers and herbs in greenhouse.
- Best results are under hot and dry conditions.
- Special attention should be given to water quality.

# SUPER LPD

Low pressure



Barb 4/7

Female

Thread 3/8"

Medium pressure



Barb 4/7

Female

Thread 3/8"

High pressure



Barb 4/7

Female

Thread 3/8"

Super LPD low-pressure bayonet for GreenSpin and Hadar 7110

Bayonet x Bayonet

Thread 3/8"

Barb 4/7



## STRUCTURE AND FEATURES

- Prevents drainage through emitters
- High and low opening and closing pressure
- Keeps system filled with water under pressure, enabling immediate start-up
- Allows all units to start-up or shut-down simultaneously
- Modular-fits all NaanDan Jain micro-sprinklers
- **Tapered or bayonet connection (bayonet available only with black low-pressure LPD)**
- Minimal pressure loss, even with high flow rates
- One-stage opening-Super LPD is either completely opened or completely closed
- Easily dismantled for cleaning and maintenance
- PE and PVC connections

Three types of Super LPD are available:

- Black: Low-pressure Super LPD for micro-sprinklers
- Green: Medium-pressure Super LPD for foggers
- Blue: High-pressure Super LPD for foggers

## OPERATING PRESSURE (bar)

	Opening	Closure
Low-Pressure Super LPD	1.4	0.6
Medium-Pressure Super LPD	3.0	1.5
High-Pressure Super LPD	4.0	2.4



# SUPER LPD

## APPLICATION EXAMPLES



Modular inverted green swivel with low-pressure Super LPD female



Hadar 7110 mist sprayer with Super LPD bayonet



Green Mist with Super LPD 3/8"



4 Foggers on X with high-pressure Super LPD 3/8"



# SPARK SOLAR PANEL CLEANING PAT.PEND

**NEW**




A unique system for cleaning and washing solar panels - ensures optimal efficiency and energy production.

**Applications:**

Solar panel washing, increasing solar efficiency

**Structure and features:**

- Two kinds of water distribution for best coverage of the area.
- Non-rotating parts for long life span even in heavy conditions, such as high temperatures, wind and dust.
- Unique stand fits most panels in the market.
- The stand maintains steady, well-aligned micro washers on the panels for optimal cleaning.
- The stand ensures zero vibration of the Solar Panel Cleaning Unit.
- Optimal water coverage of the panel.
- All components are modular and easy to assemble without a need for special tools.
- Easy, user-friendly assembling and dismantling of the stand on the panel.

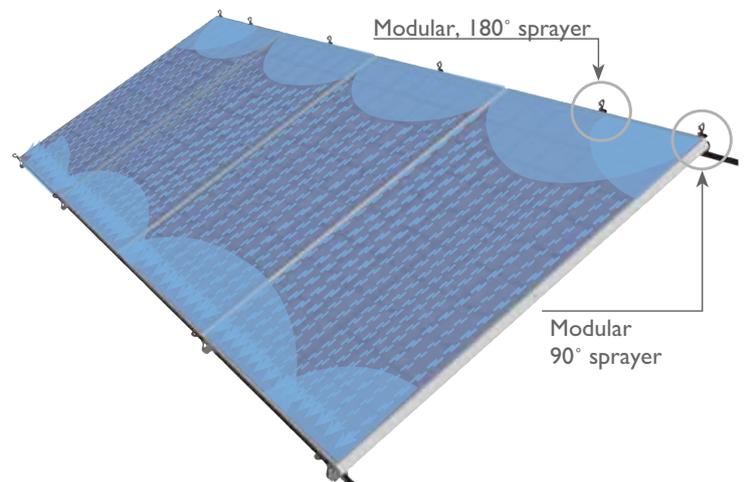

## TECHNICAL DATA

- Recommended working pressure: 2.0-3.0 bar
- Filtration requirement: 200 microns

### SPARK NOZZLE AND FLOW RATE VS. PRESSURE

Color	Flow rate (l/h)	Nozzle ID (mm)	Pressure (bar)		
			2.0	2.5	3.0
Green	105	1.41	105	117	129
Orange	120	1.50	120	134	147

### NUMBER OF MICRO-WASHERS FOR DIFFERENT LATERAL DIAMETERS

Lateral diameter (mm) (grade 4)	Flow Rate (l/h) (at 2 bars)	
	105	120
	Number of Spark units	
16	12	11
20	20	17
25	30	20
32	50	45



# ACCESSORIES

Item #		
897030	Butterfly 3/8" x 4/7	
897028	Butterfly 3/8" x 7/10	
897010	Butterfly barb 4/7, black	
897016	Butterfly 3/8"	
897019	Butterfly barb 4/7, grey	
897017	Butterfly quick thread	
897012	Butterfly 1/4" thread	
897013	Butterfly parallel	
897011	Butterfly 7/10	
897002	Head 3/8" BSP	
897001	Head 1/2" BSP	
790308	Low-pressure Super LPD, female (black)	
790328	Low-pressure Super LPD, 4/7 (black)	
790348	Low-pressure Super LPD, 3/8" (black)	
790302	Medium-pressure Super LPD, female (green)	
790322	Medium-pressure Super LPD, 4/7 (green)	
790342	Medium-pressure Super LPD, 3/8" (green)	
790303	High-pressure Super LPD, female (blue)	
790323	High-pressure Super LPD, 4/7 (blue)	
790343	High-pressure Super LPD, 3/8" (blue)	
790228	Low-pressure Super LPD bayonet, 4/7 (black)	
790248	Low-pressure Super LPD bayonet, 3/8" (black)	
790258	Super LPD bayonet / bayonet	
J67202J1000	Stabilizer 13 cm for suspended stand	

# ACCESSORIES

Item #		
897032	Barb 4/7 x 4/7	
897042	Parallel barb 4/7	
897065	Plug for barb 5/8 (male)	
897055	Fast-n-Fast plug	
790100	Fast-n-Fast connector	
897272	Socket 1/2" BSPT	
897270	Nipple 1/2" x 1/2"	
890300	Filter for Super LPD	

## HADAR 7110, 2005 ACCESSORIES

Item #		
484921	1/2" bayonet base	
484931	3/8" bayonet base for rigid pipes	
497051	Bayonet female base	
497041	Bayonet male	
497031	Bayonet plug	

# ACCESSORIES

## SUSPENDED STANDS with stabilizer 13 cm and barb 4/7

Item #		
1	797124	Suspended stand 30 cm and "fast-n-fast"
1	797129	Suspended stand 60 cm with "fast-n-fast"
2	797403	Suspended stand 30 cm for 7110 Hadar
2	797405	Suspended stand 60 cm for 7110 Hadar
3	797340	Suspended stand 30 cm + mini-valve for Modular
3	797343	Suspended stand 60 cm + mini-valve for Modular
4	797140	Suspended stand 30 cm with butterfly
4	797143	Suspended stand 60 cm with butterfly
5	797443	Suspended stand 30 cm + Super LPD, black for Modular
5	797446	Suspended stand 60 cm + Super LPD, black for Modular
6	797453	Suspended stand 30 cm + Super LPD, blue for Fogger
6	797456	Suspended stand 60 cm + Super LPD, blue for Fogger
7	797463	Suspended stand 30 cm + bayonet Super LPD, black
7	797466	Suspended stand 60 cm + bayonet Super LPD, black



3.2 mm Green punch & pusher for butterfly stands & 4/7 barb suspended stands.  
Item # 897285  
All above stands for using with PE pipe only

## SUSPENDED STANDS \* with stabilizer 13 cm and butterfly 3/8"

Item #		
1	797190	Suspended stand 30 cm and "fast-n-fast"
1	797192	Suspended stand 60 cm and "fast-n-fast"
2	797423	Suspended stand 30 cm for 7110 Hadar
2	797426	Suspended stand 60 cm for 7110 Hadar
3	797363	Suspended stand 30 cm + mini valve for Modular
3	797366	Suspended stand 60 cm + mini valve for Modular
4	797180	Suspended stand 30 cm and butterfly
4	797182	Suspended stand 60 cm and butterfly
5	797473	Suspended stand 30 cm + Super LPD, black for Modular
5	797476	Suspended stand 60 cm + Super LPD, black for Modular
6	797483	Suspended stand 30 cm + Super LPD, blue for Fogger
6	797486	Suspended stand 60 cm + Super LPD, blue for Fogger
7	797493	Suspended stand 30 cm + bayonet Super LPD, black
7	797496	Suspended stand 60 cm + bayonet Super LPD, black



\* Optional additional lengths upon request.

### 3/8" butterfly suspended stands for using with PVC pipe only (rigid)

Process for preparing 3/8" thread in PVC pipe:

1. preparing a hole using 7.6 mm drill.
2. Preparing thread using 3/8" BSW screw-tap.

# ACCESSORIES

## SUSPENDED STANDS\* With bayonet male

Item #		
1	797430	Suspended stand 30 cm and butterfly
1	797432	Suspended stand 60 cm and butterfly
2	797125	Suspended stand 30 cm and "fast-n-fast"
3	493125	Suspended stand 30 cm and female bayonet
3	493114	Suspended stand 50 cm and female bayonet
3	493119	Suspended stand 60 cm and female bayonet
3	493021	Suspended stand 20 cm and female bayonet
3	493121	Suspended stand 90 cm and female bayonet

\* Optional additional lengths upon request.



## BUTTERFLY STANDS

With butterfly 4/7 and barb 4/7

Item #	Standard lengths
797030	60 cm
797032	75 cm
797033	75 cm (grey butterfly)
797038	100 cm
797040	120 cm
797042	150 cm



3.2 mm Green punch & pusher for butterfly stands & 4/7 barb suspended stands.  
Item # 897285  
All above stands for using with PE pipe only

## SPIKES

Item #		
1	897908	Spike 31 black
2	897947	Spike 37 red
3	897917	Spike 34 red
4	897938	Spike 36 black
5	496601	Spike for Hadar 7110



## MAINTENANCE FOR MICRO-SPRINKLERS & FOGGERS

NaanDanJain micro-sprinklers should be installed and operated according to the recommendations in the relevant catalogs.

Find the filtration requirements for your specific product in the NDJ catalog or NDJ web catalog (NaanDanJain.com > web catalog).

NaanDanJain products should operate for a long period of time. However, with time, lime deposits might occur. This document will guide you on how to remove it.

### FLOW RATE CHECK

Once a year, perform a random check of a few micro-sprinklers at the recommended working pressures, and compare the actual flow rate in the field to the values that appear in the catalog, including the permitted tolerance.

#### Non-regulated micro sprinklers:

1. Low flow rates – may indicate possible clogging in the nozzle, at the entrance to the micro-sprinkler and in the filters, so these should be checked.
2. High flow rates – may indicate wear and tear in the nozzle, which should then be replaced.

#### Regulated micro-sprinklers:

1. Low flow rates – may indicate possible clogging in the nozzle, at the entrance to the micro-sprinkler and in the filters, so these should be checked.
2. High flow rates
  - 2.1 Open the micro-sprinkler to verify that the disk is in place and positioned freely. Clean the disk and wash the area, and then perform another flow rate check.
  - 2.2 If the flow rate remains higher than the permitted maximal rate, it may indicate a decrease in the quality of the disk, which must then be replaced.

### CLEANING INSTRUCTIONS FOR REMOVING LIME DEPOSITS

#### SAFETY MEASURES:

Only use acid-resistant containers for the cleaning process.

Use adequate body protection in order to prevent any direct contact with the acid solution.

Purchase the acid only from official suppliers. Use the acid according to their official MSDS (material safety data sheet).

Tapered connection must be unassembled before the acid cleaning treatment.

The cleaning solution is water, diluted with hydrochloric acid (HCl). Note that the acid should be poured into the water.

#### DILUTION EXAMPLE:

Hydrochloric acid at 32 % concentration

Recommended treatment concentration: 0.2%


Concentration of the solution:  $(0.2:32) \times 1000 = 6.25$

This means that 6.25 milliliters of acid are diluted in 1 liter of water.

## CLEANING PROCESS

The micro-sprinklers/foggers should be immersed in the solution for 3 hours and then properly washed with water. The process can be repeated up to 4 times (a maximum of 12 hours) if the first cleaning cycle did not clean the sprinklers perfectly.

**Warning:** You can damage the micro-sprinklers with a high concentration of acid. Make sure to follow the instructions exactly, or first try on small number of micro-sprinklers.

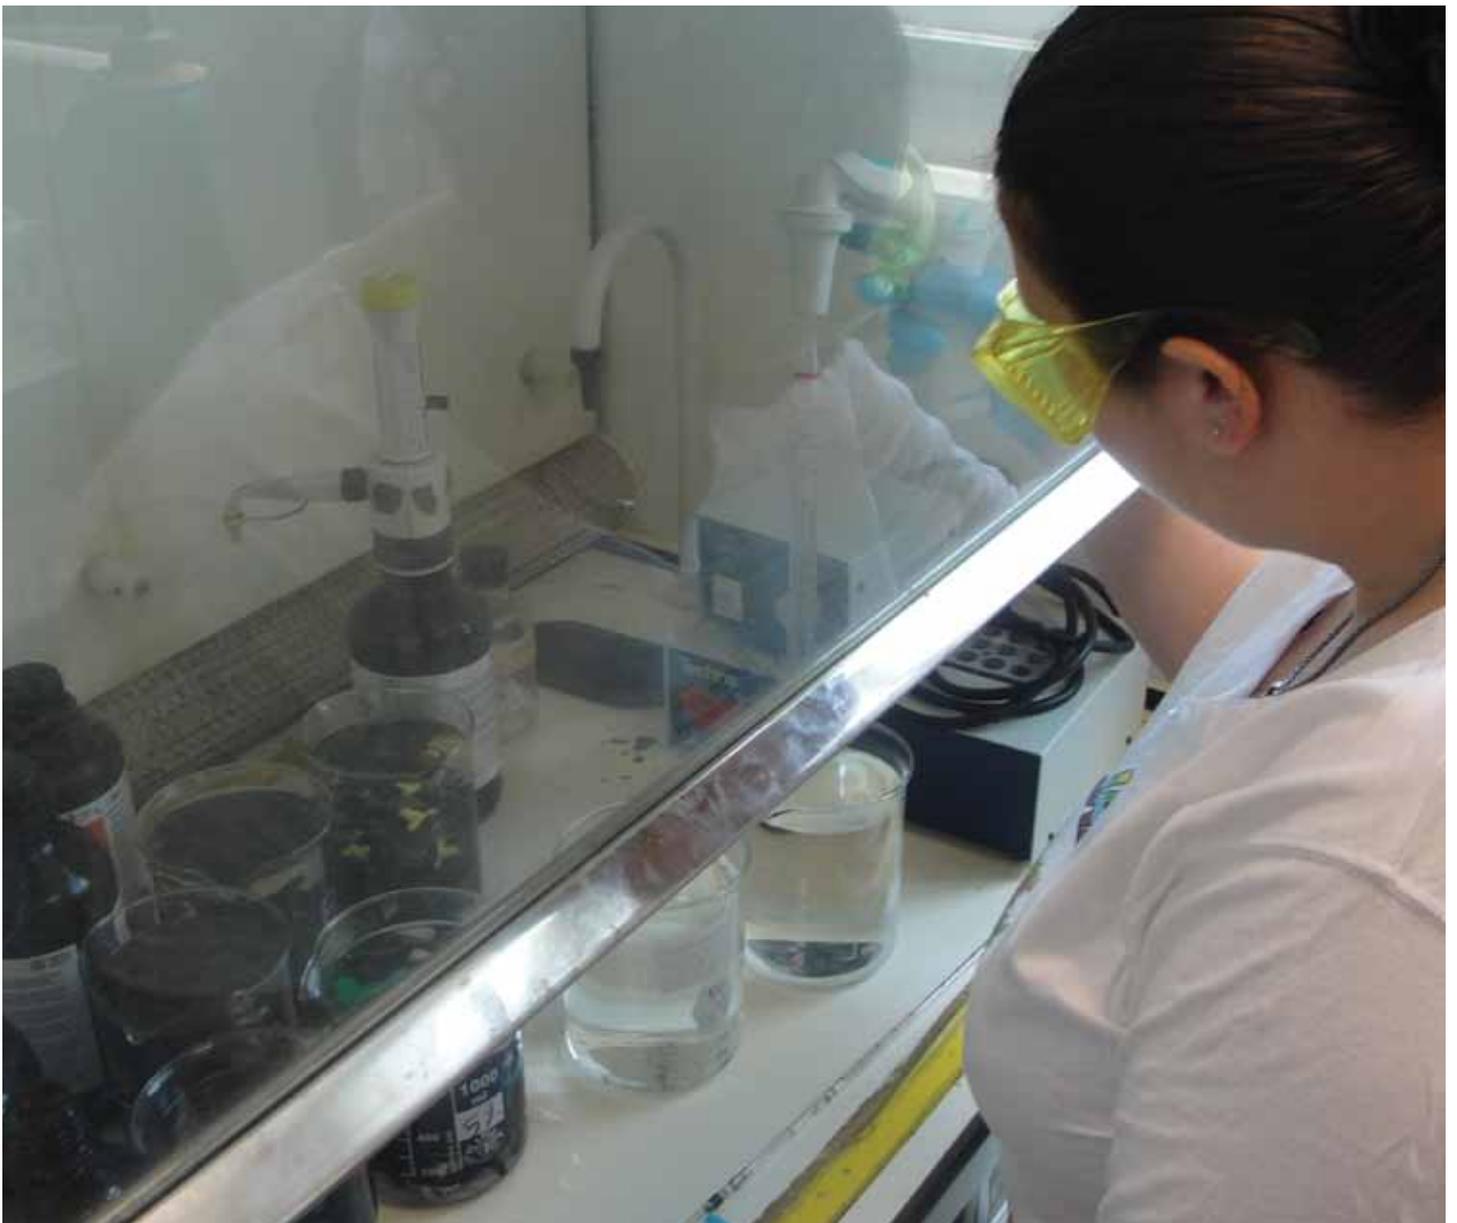



© NAANDANJAIN LTD. 05/2018 P116001

© 2018 NaanDanJain Ltd. All rights reserved.  
All specifications are subject to change without notice.

**NAANDANJAIN**  
A JAIN IRRIGATION COMPANY



**NaanDanJain Irrigation Ltd.**

Post Naan 7682900, Israel. T:+972-8-9442180, F:+972-8-9442190  
E: [contact@naandanjain.com](mailto:contact@naandanjain.com) [www.naandanjain.com](http://www.naandanjain.com)